



# **BECKSON MANUFACTURING, INC.**



*Quality Accessories*

*Dependable Products*





# Beckson Manufacturing, Inc.



## Access Plates

### Materials

Materials are very important to Beckson and we mold our products out of only the best virgin materials. Standard materials for access plates are ABS and Polypropylene. We include the best available UV stabilizers to provide our customers with a superior product they can depend on.

### Polypropylene

Beckson introduced the first polypropylene access plate to customers in 1972. We answered their call to manufacture a product that would be resistant to solvents. Polypropylene access plates are available in matte finish solid colors. Please add suffix "P" at the end of the part number for polypropylene material. Gaskets are not necessary to seal these plates, but are available for peace of mind.

*Example: AP40-WP: 4" white poly plate.* Please call if additional details are needed. Please consult a sealant manufacturer for best adhesion results.

### Access Plates - Pry-Out

Beckson developed the first pry-out access plate. Designed with an extra heavy o-ring to assure a liquid tight fit. Our clear center plates allow observation of controls or inspection without opening. For areas where internal back pressure is significant, see Beckson Screw-Out access plates. Smooth and non-skid surfaces are available.

Standard sizes include: 6" and 8" I.D. models.

Standard packs are: 6"= 50 & 8"= 25

Standard colors are black ,white, beige and grey. (B, W, N, S)

Custom logo inserts are available for runs of size.

Please add "-C" suffix for clear center.

*Sample Part number AP61-W-C : White 6" pry, smooth surface with clear center*



*Easy Access  
&  
Easy Viewing*


*Multiple Textured  
Surfaces*

Item	I.D.	O.D.	Surface Type	Fastener
AP61-B,W,N & S				
AP61	6.0"	8.125"	Smooth	# 8 pan x (6)
AP63	6.0"	8.125"	Dimple	# 8 pan x (6)
AP65	6.0"	8.125"	Diamond	# 8 pan x (6)
AP81	7.62"	10"	Smooth	#10 pan x (6)
AP83	7.62"	10"	Dimple	#10 pan x (6)
AP85	7.62"	10"	Diamond	#10 pan x (6)

Beckson Manufacturing, Inc. 165 Holland Avenue, Bridgeport, CT 06605 USA

web: [www.becksonmfg.com](http://www.becksonmfg.com) E-mail: [info@becksonmfg.com](mailto:info@becksonmfg.com)

## Access Plates - Continued

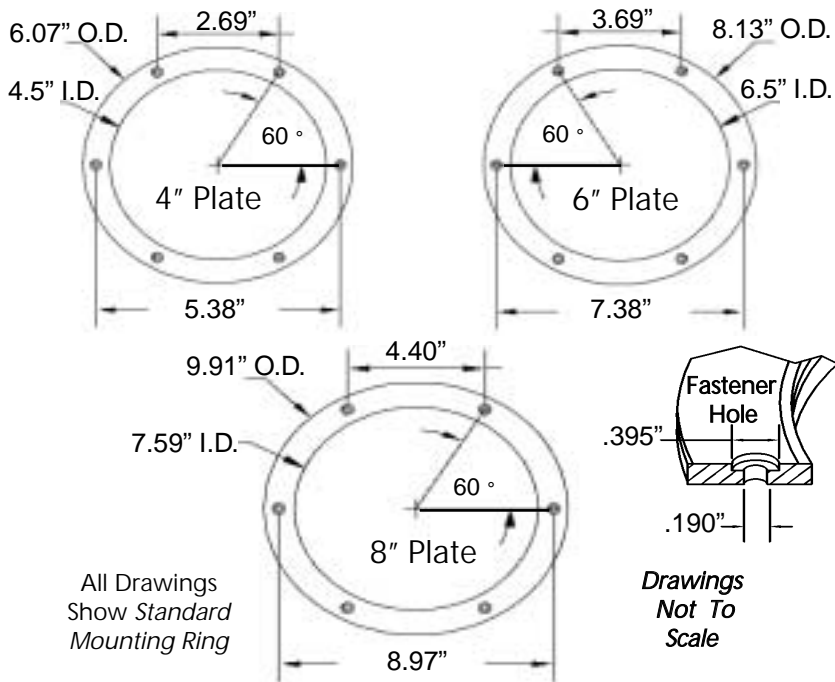

### Screw-out

Beckson's Screw-Out access plates are designed to provide access without the use of tools. Its single non-jamming (no cross thread), self-cleaning buttress thread and self centering lid combine for a fluid tight seal without cross threading. Our clear center plates permit observation without the necessity of removing the center. Screw-out plates should be used in applications where changes in air or back pressure may occur. All plates come standard with a gasket. Non-skid surfaces are available on several models. Standard sizes include: 4", 6" and 8" I.D. models. Standard packs are: 4"= 100, 6"= 50 & 8"= 20 Standard colors are black ,white, beige and grey. (B, W, N, S) Custom logo inserts are available for volume runs.

Sample Part number AP60-W-C : White 6" smooth with clear center. Please add "- C " suffix for clear center.

Item	I.D.	O.D.	Surface Type	Fastener
AP40-B,W,N & S				
AP40	4"	6.125"	Smooth	# 8 pan x (6)
AP60	6"	8.125"	Smooth	# 8 pan x (6)
AP62	6"	8.125"	Dimple	# 8 pan x (6)
AP64	6"	8.125"	Diamond	# 8 pan x (6)
AP80	7.62"	10"	Smooth	#10 pan x (6)
AP82	7.62"	10"	Dimple	#10 pan x (6)
AP84	7.62"	10"	Diamond	#10 pan x (6)





# Beckson Manufacturing, Inc.



Limited Access

Tight Fit? No Problem


Thin Rings Cover Less Space

Quick Twist Access

## Cover & Access Plates

### Cover Plates


Beckson cover plates are designed to conceal installation holes, or may be used where limited access is desired. Conceal holes up to 5.125" in diameter and mount with four screws.

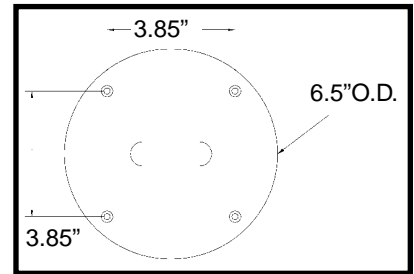

Standard pack: 100. Standard colors are black and white.

### Thin Ring - Access Plates

In some locations space may be extremely limited. Beckson has developed outside rings for our 4" & 6" models that are at least 1/2" smaller in diameter for these applications. These

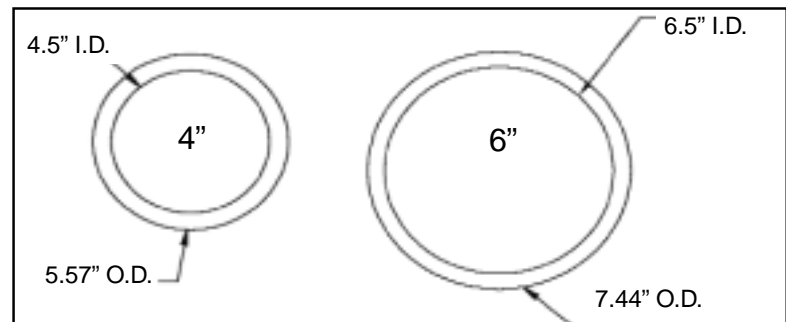

thin ring access plates feature fastenerless mounting, but may be drilled and counter bored for normal pan head screws or bolts.

### 5" Twist - Access Plate

Beckson's 5" Twist plate is designed to conceal its mounting fasteners for a modern "look". The ramped bayonet threads provide twist closure which just 1/8 turn. The low profile plate is self centering with three separate sealing areas each designed to chase liquid away from the plate opening.

Sample part number AP50-W, access plate 5", white.

Standard colors are (B) black and (W) white. Standard pack is 100 pieces. O.D.: 7.0" I.D.: 5.1"

### Adapter Rings

Beckson developed adapter ring for the bottom of its 4" 5" & 6" access plates. The adapter ring along with drop in ring creates the set which allows for a "drop-in" installation. The "drop-in" ring may be altered to hold a screen or a sewn bag. Sample part number AP40AW: Access plate 4", white, adapter ring set.



# Beckson Manufacturing, Inc.

## Access Plate Accessories

### **Stainless Steel Safety Chain**

Made from stainless steel bead chain, this safety chain attaches both to the center post on the lid and to the ring to prevent the loss of the lid. Standard length is 8". Custom lengths are available. Chain may be shipped separately or *installed* to the access plate for you at our facility. Stainless steel:  
 Part Number: APACO8  
 Fasteners: #6



### **Access Plate Pry-Bar**

Used for removing the access plate center on Beckson's pry-out access plates (6" & 8"). This pry bar is constructed from quality aluminum. Stainless steel lanyard is also included.



### **Drain Plug**

Screw-type 1" black drain plug with self-cleaning thread comes assembled with o-ring gasket. Retaining legs help secure center while draining. Position gap thread to lowest point when installing. Ideal relief for tank drainage, coolers, sinks and access. Standard colors are black and white.  
 Standard pack 100 Part Number: AP10-B  
 O.A.: 1.25" x 2" Hole cut 1"

## Hand Pumps

### **Siphon-Mate - Fuel Transfer Pumps**

Safety experts warn about the unsafe practice of siphoning petroleum by mouth. Pump several half strokes to prime the pump. Once primed, leave pump handle fully extended for siphon, push down to stop. Drain pump of all flammable liquids prior to storage. **Pump is intended for diesel, oil or water.** Lifts 4 oz per stroke.. Length 11.5" & Diameter 1.25"

**9PCC** - Supplied with unattached clear tubing and in-line foot allows for versatile application. Cut tubing to desired length for intake and discharge.

**9A** - A close cousin to the 9PC, the 9A is intended for similar function. Supplied with attached clear tubing and right angle foot, the 9A allows the same safe transfer of fuels as the 9PC. Drain pump of all flammable liquids prior to storage.

#### **Safety Usage Guide:**

Make sure all containers, if made of conductive material, are grounded and not near open flames, sparks or hot surfaces. Container should be kept in an area where spillage will not flow to an ignition source. Liquids should only be transferred to an appropriate tank. **DO NOT SMOKE WHILE USING THIS PRODUCT.** Guidelines for handling flammable liquids may be obtained from the *National Fire Protection Association, Batterymarch Park, Quincy, MA. 02269*



**For Fuel or Water**