

BECKSON MANUFACTURING, INC.



Quality Accessories

Dependable Products











Beckson Manufacturing, Inc.

Access Plate Accessories

Stainless Steel Safety Chain

Fasteners: #6

Made from stainless steel bead chain, this safety chain attaches both to the center post on the lid and to the ring to prevent the loss of the lid. Standard length is 8". Custom lengths are avialable. Chain may be shipped separately or *installed* to the access plate for you at our facility. Stainless steel: Part Number: APACO8

Access Plate Pry-Bar

Used for removing the access plate center on Beckson's pry-out access plates (6" & 8"). This pry bar is constructed from quality aluminum. Stainless steel lanyard is also included.




Drain Plug

Screw-type 1" black drain plug with self-cleaning thread comes assembled with o-ring gasket. Retaining legs help secure center while draining. Position gap thread to lowest point when installing. Ideal relief for tank drainage, coolers, sinks and access. Standard colors are black and white.

Standard pack 100 Part Number: AP10-B O.A.: 1.25" x 2" Hole cut 1"

Hand Pumps

Siphon-Mate - Fuel Transfer Pumps



9PCC - Supplied with unattached clear tubing and in-line foot allows for versatile application. Cut tubing to desired length for intake and discharge.

9A - A close cousin to the 9PC, the 9A is intended for similar function. Supplied with attached clear tubing and right angle foot, the 9A allows the same safe transfer of fuels as the 9PC. Drain pump of all flamable liquids prior to storage.

Safety Usage Guide:

Make sure all containers, if made of conductive material, are grounded and not near open flames, sparks or hot surfaces. Container should be kept in an area where spillage will not flow to an ignition source. Liquids should only be transferred to an appropriate tank. DO NOT SMOKE WHILE USING THIS PRODUCT. Guidelines for handling flammable liquids may be obtained from the National Fire Protection Association, Batterymarch Park, Quincy, MA. 02269




For Fuel or Water

Beckson Manufacturing, Inc. 165 Holland Avenue, Bridgeport, CT 06605 USA

web: www.becksonmfg.com E-mail: info @becksonmfg.com
Tel: 203-366-3644 or Fax: 203-384-2484



Beckson Manufacturing, Inc.

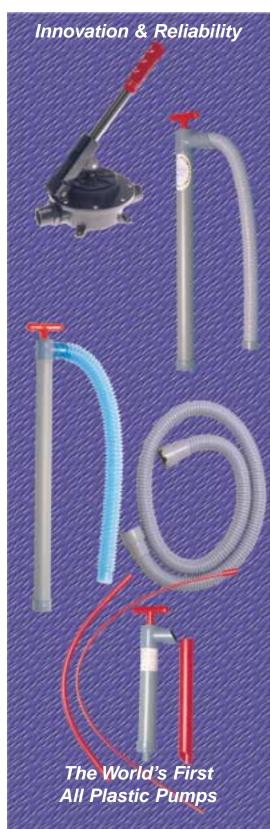

Hand Pumps 954DP2 Diaphram Pump

Made from durable plastic, this diaphram pump, with adjustable (octagonal frame) mounting, permits up to 16 different variations in stroke direction with its two position stainless handle. Mounts vertically or horizontally without the need for special brackets. Uses 1.5" hose. Length 9" width: 6.25" height 4.5" pumps 16 gallons per minute or approximately 1 liter per stroke. Intended for use with water only.

124PF Thirsty-Mate® Pump

Our signature pump, this pump made of the finest materials will not rust or corrode. For water use only, this pump also has a removable foot for cleaning out any obstructing debris. Length 24", Diameter 1.75" & flow rate of 10 GPM. Two foot discharge hose standard, other lengths available.

136PF Thirsty-Mate® Pump

A cousin to the 124PF, Beckson's 136PF is 36" in length with a three foot discharge hose. This pump is designed to pump water only. Diameter 1.75" & flow rate of 13 GPM.

Pump Accessories Hose Extensions, Foot Valves & Rock Strainers





124 and 136 model pumps may be fitted with longer hose for discharge or intake in those tough to reach places. Models FPH-1.25-4 or FPH1.25-6. Both come standard with foot and strainer valves. Replacement foot valves are available. Please inquire about our rockstrainer valve (replaces foot valve) for the tough applications.

230PF Handy-Mate™ Utility Pump

This 30" pump is ideal for quick removal of water from tough areas. Its permanently attached 32" blow molded hose provides for easy discharge. Length 30", diameter 1.5" & flow rate 10 GPM.

212PC Handy-Mate™

This universal pump is designed to be used around the home, car, RV or boat to handle routine or emergency pumping requirements. The pump comes standard with a dip stick tube for removing oil. Requires no priming. Length12.75" & 8oz per stroke

Beckson Manufacturing, Inc. 165 Holland Avenue, Bridgeport, CT 06605 USA web: www.becksonmfg.com E-mail: info @becksonmfg.com

☎Tel: 203-366-3644 or Fax: 203-384-2484



Hose & Accessories -

HOSE - FH & VCS Series Temp: -20 to 150F

Flexible wire reinforced Hose (FH) Left Handed Thread Beckson's flexible wire reinforced hose has a coated flexible steel wire in its construction to avoid collapse or distortion. Best for pumps, water systems and vaccuum lines.

Item	I.D.	Color	Working Pressure
FH-075	.750"	Grey	-12 PSI to + 26 PSI
FH-100	1.000"	Grey	-12 PSI to + 26 PSI
FH-112	1.125"	Grey	-12 PSI to + 26 PSI
FH-125	1.250"	Grey	-12 PSI to + 26 PSI
FH-150	1.500"	Grey	-12 PSI to + 26 PSI
FH-200	2.000"	Grey	-12 PSI to + 26 PSI

VCS Hose - Wire reinforced with smooth inside wall.

VCS-150W 1.500" White -12 PSI to + 36 PSI

VP Hose - Copolymer Hose, Non Conductive - Temp: -60 to 140 F Item I.D. Color Working Pressure VP-125 1.25" Lt. Grey - 9 PSI to + 14 PSI VP-150 1.50" Lt. Grey - 9 PSI to + 14 PSI VP-200 2.00" Lt. Grey - 9 PSI to + 14 PSI

End Fittings - Screw Type with Smooth Clamping Area

Item	Hose a	& Outlet	Color
EF-075	.750	x .750"	Grey
EF-100	1.00	x 1.00"	Grey
EF-125	1.25	x 1.03"	Grey
EF-150	1.50	x 1.50"	Grey
EF-150W	1.50	x 1.50"	White
EF-200	2.00	x 2.00"	Grey


Couplings - For (FH & VCS)

IIGIII	LIOSE	COIOI	
CP-125	1.25"	Grey	
CP-150	1.50"	Grey	
CP-200	2.00"	Grey	
A-1	1.25"	Black	1.25" male to 1.50"
CV-150	1.50"	Black	Inline Check Valve

Strainers - For (FH & VCS)

Item	Hose	Color
STV-1	FH-1.00"	Grey
STV-125	FH-1.25"	Grey
STV-150	FH-1.50"	Grey
STV-2	FH-2.00"	Grey

All Strainers are non-corroding and include check valve.

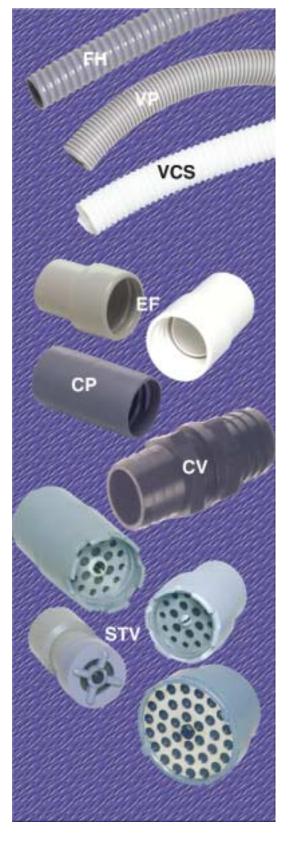

Beckson Manufacturing, Inc. 165 Holland Avenue, Bridgeport, CT 06605 USA

web: www.becksonmfg.com E-mail: info @becksonmfg.com

Tel: 203-366-3644 or Fax: 203-384-2484